

**INSTALLATION INSTRUCTIONS**  
**for the**  
**DRYER OVERTEMPERATURE THERMOSTAT**  
**on the**  
*Kodak RP X-Omat* **PROCESSOR, MODEL M6B**  
*Kodak Professional Industrex M6-I* **PROCESSOR**  
*Kodak X-Omat* **PROCESSOR, MODEL M6RA**  
*Kodak X-Omat 460 RA* **PROCESSOR**  
*Kodak X-Omat 480 RA* **PROCESSOR**



HEALTH IMAGING

---

---

**PLEASE NOTE** The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by Kodak's negligence or other fault.




This equipment includes parts and assemblies sensitive to damage from electrostatic discharge. Use caution to prevent damage during all service procedures.

**DRYER OVERTEMPERATURE THERMOSTAT includes:**

Part No.	Description	Quantity
8B6902	DRYER OVERTEMPERATURE THERMOSTAT	1
7C8226	STANDOFF	2
7C8276	INSTALLATION INSTRUCTIONS	1

## Installing the DRYER OVERTEMPERATURE THERMOSTAT

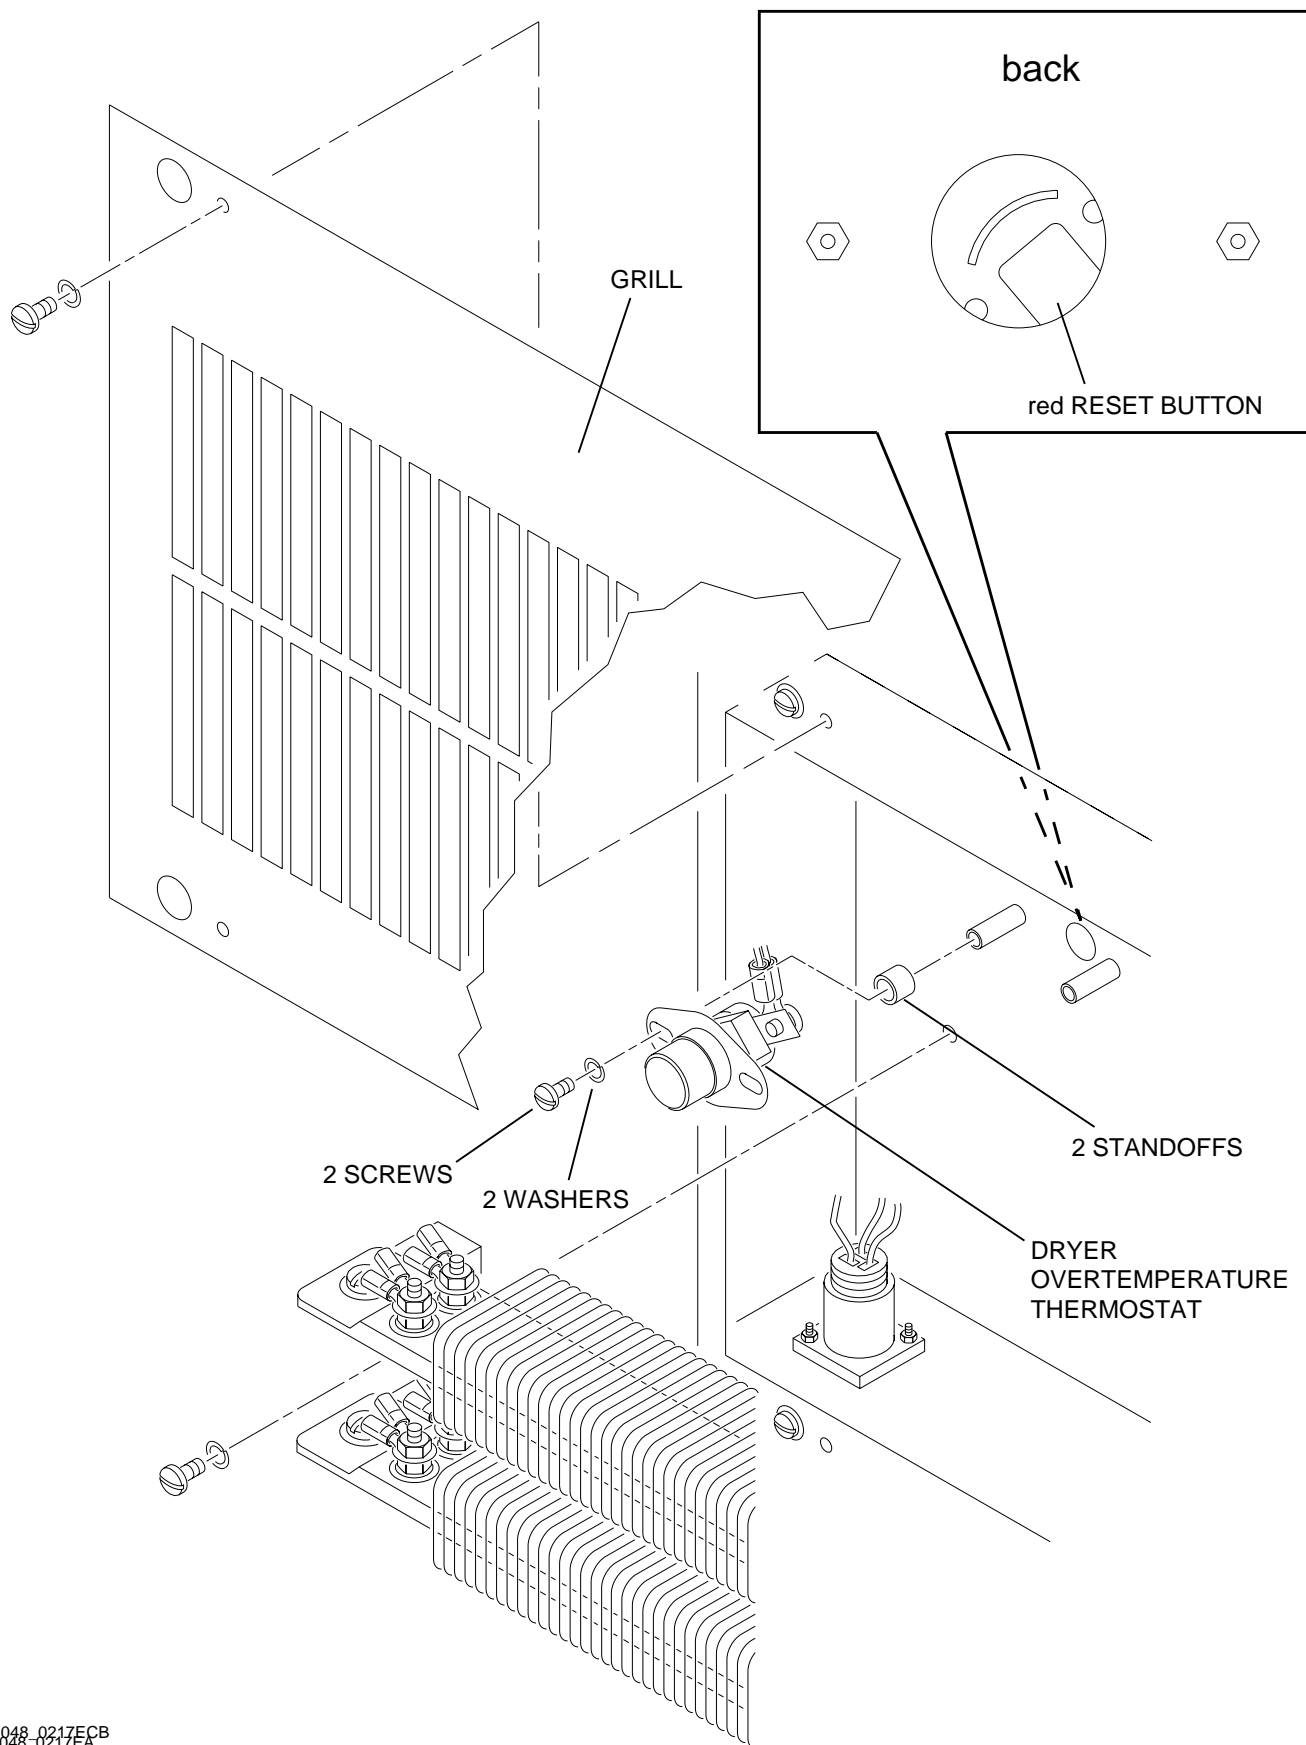

H048\_0217ECB  
H048\_0217EA



### Warning

Dangerous Voltage

[1] De-energize the PROCESSOR.

[2] Remove:

- AIR TUBES
- ROLLERS
- GRILL



### Note

For removal information, see the SERVICE MANUAL for each PROCESSOR.

[3] Disconnect the wires to the DRYER OVERTEMPERATURE THERMOSTAT.

[4] Remove:

- 2 SCREWS and keep
- 2 WASHERS and keep
- DRYER OVERTEMPERATURE THERMOSTAT and discard

[5] Install the 2 new STANDOFFS.



### Important

The position of the DRYER OVERTEMPERATURE THERMOSTAT must allow for easy access to the red RESET BUTTON.

[6] Use the 2 SCREWS and 2 WASHERS from Step 4 to install the new DRYER OVERTEMPERATURE THERMOSTAT.

[7] Assemble the PROCESSOR.



### Note

The red RESET BUTTON is offset on the following PROCESSORS:

PROCESSOR	Serial No.
M6RA, 460 RA, 480 RA	All
M6B	23,474 and below
M6I	3,135 and below

### Publication History

Print Date	Pub No.	Affected Pages	Filename	Description
16MAR98	7C8276	All	ii3040_2_16mar98.doc	First Printing

*Kodak, Kodak Professional, Industrex and X-Omat are trademarks.*

